


### Характеристики

**Рабочее давление** Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 1 bar (at 60 °C)

**Резьбовые детали** Polyamide (PA)

**Гайка** Polypropylene (PP)

**Зажимное кольцо** Polypropylene (PP)

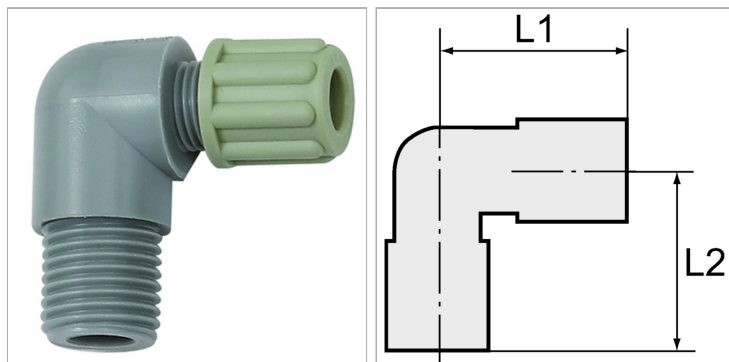

### Указания

Прочие данные только по запросу.

### Описание

Manufactured from high impact-resistant, UV-stabilised engineering plastic, extremely resistant to weathering. Good chemical resistance to benzene, diesel oil, fuel oil and alkalis.

Not suitable for use with acids.

### Артикул

Наименование	Резьба	L1	L2
<a href="#">K-07403282</a>	G 1/8	25,0	20,0
<a href="#">K-07403283</a>	G 1/8	30,0	23,0
<a href="#">K-07403284</a>	G 1/8	36,0	25,0
<a href="#">K-07403285</a>	G 1/8	40,0	27,0
<a href="#">K-07403286</a>	G 1/4	26,0	25,0
<a href="#">K-07403287</a>	G 1/4	30,0	27,0
<a href="#">K-07403288</a>	G 1/4	36,0	32,0
<a href="#">K-07403289</a>	G 1/4	40,0	31,0
<a href="#">K-07403290</a>	G 3/8	29,0	30,0
<a href="#">K-07403291</a>	G 3/8	33,0	27,0
<a href="#">K-07403292</a>	G 3/8	36,0	29,0
<a href="#">K-07403293</a>	G 3/8	40,0	31,0
<a href="#">K-07403294</a>	G 1/2	32,0	29,0
<a href="#">K-07403295</a>	G 1/2	36,0	29,0
<a href="#">K-07403296</a>	G 1/2	39,0	31,0
<a href="#">K-07403297</a>	G 1/2	43,0	33,0