


Характеристики

Рабочая температура	Max. 200 °C
Рабочее давление	Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 1 bar (at 170 °C)
Материал	Perfluoroalkoxy alkane (PFA)

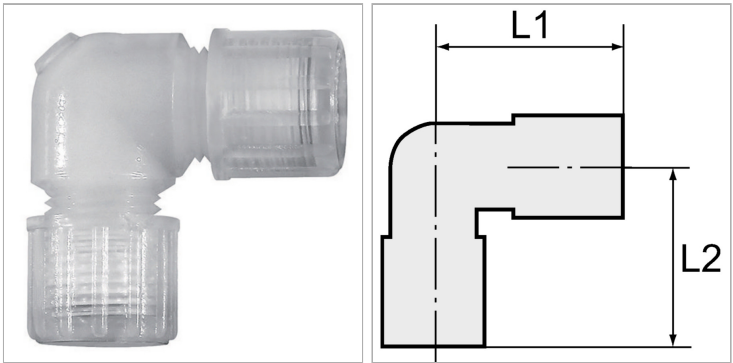

Указания

Прочие данные только по запросу.

Описание

Perfluoroalkoxy alkane (PFA): A fluoroplastic (PTFE) with the same chemical resistance as PTFE but much stronger and suitable for temperatures up to 200°C.

Артикул

Наименование	L1	L2
K-07404158	25,0	25,0
K-07404160	30,0	30,0
K-07404162	36,0	36,0