


Характеристики

Рабочая температура	Max. 200 °C
Рабочее давление	Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 1 bar (at 170 °C)
Материал	Perfluoroalkoxy alkane (PFA)

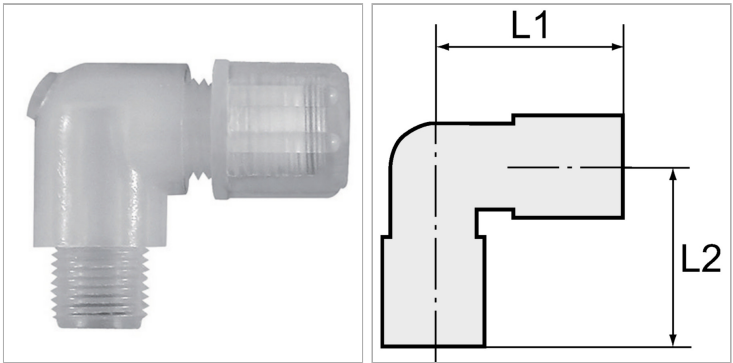

Указания

Прочие данные только по запросу.

Описание

Perfluoroalkoxy alkane (PFA): A fluoroplastic (PTFE) with the same chemical resistance as PTFE but much stronger and suitable for temperatures up to 200°C.

Артикул

Наименование	Резьба	L1	L2
K-07404180	G 1/8	25,0	20,0
K-07404182	G 1/8	30,0	23,0
K-07404184	G 1/8	36,0	25,0
K-07404187	G 1/4	26,0	25,0
K-07404189	G 1/4	30,0	27,0
K-07404191	G 1/4	36,0	32,0
K-07404194	G 3/8	29,0	30,0
K-07404196	G 3/8	33,0	27,0
K-07404198	G 3/8	36,0	29,0
K-07404201	G 1/2	32,0	29,0
K-07404203	G 1/2	36,0	29,0
K-07404205	G 1/2	39,0	31,0