


### Характеристики

<b>Рабочая температура</b>	-20 °C to +70 °C in air; +1 °C to +70 °C in water
<b>Материал</b>	Acetalpolymerisat (POM)
<b>Уплотнение</b>	Нитрильный каучук
<b>Рабочее давление</b>	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)

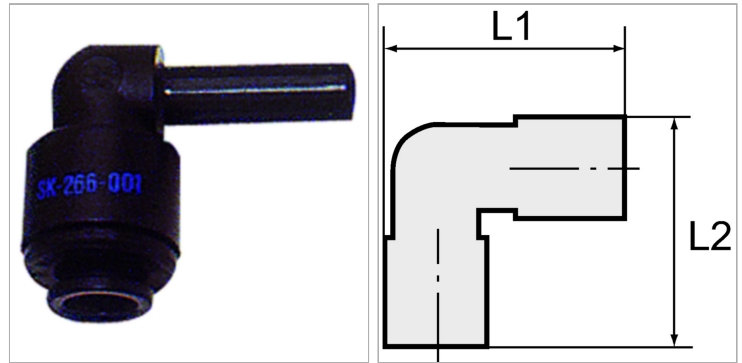

### Указания

Прочие данные только по запросу.

### Описание

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

### Артикул

Наименование	Штуцеры	L1	L2
<a href="#">K-07402902</a>	4	22,8	27,3
<a href="#">K-07402903</a>	5	22,8	27,3
<a href="#">K-07402904</a>	6	25,9	30,8
<a href="#">K-07402905</a>	8	28,4	34,4
<a href="#">K-07402906</a>	10	32,7	38,8
<a href="#">K-07402907</a>	12	42,3	48,5
<a href="#">K-07402908</a>	15	50,7	57,9
<a href="#">K-07402909</a>	18	54,2	62,1