


Характеристики

Внутренний слой	Soft-PVC, black
Вставка	Оплетка из полиэфира
Наружный слой	Soft-PVC, blue
Температура	-20 °C to +60 °C
Длина рулона	50 m

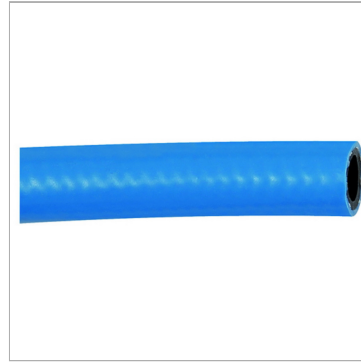

Указания

Прочие данные только по запросу.

Описание

Highly flexible hose for compressed air applications in workshop areas (compressed air feed for pneumatic tools, equipping assembly stations, etc.). Thanks to the even fabric reinforcement, this hose combines high pressure resistance, very good handling and high mechanical strength with excellent bond adhesion. The high level of ozone resistance further enhances the hose's durability and reliability. TÜV approved.

Артикул

Наименование	Внутренний Ø шланга	Внешний Ø шланга	max. Betriebsdruck bei 23°C	Мин. радиус изгиба
K-07101033	6,3	11,0	15	23
K-07101034	8,0	13,0	15	28
K-07101035	9,0	14,5	15	32
K-07101036	10,0	15,5	15	35
K-07101037	12,7	19,0	15	45
K-07101038	16,0	23,0	15	56
K-07101039	19,0	26,5	15	67
K-07101040	25,0	33,5	15	88