


3/2-way pilot valves with parallel male thread with O-ring

Обновлено: 05.04.24

Характеристики

Рабочее давление	Max. 15 bar, coarse vacuum
Область температур	-20 °C to +80 °C
Рабочие среды	Compressed air and all gases or liquids that are compatible with the materials
рекомендуемые шланги	PU or PA (nylon)
Область применения	Air, vacuum
Уплотнительная поверхность	Parallel version: O-ring in housing, Conical version: thread coating
Материал	Plastic, Nickel plated brass
Прижимное кольцо	Plastic

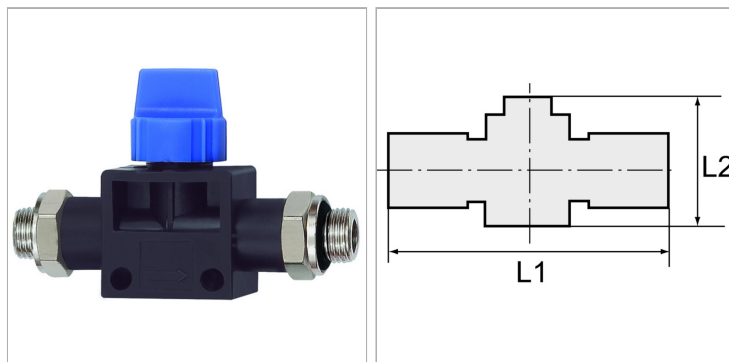

Указания

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Артикул

Наименование	Резьба 1	Резьба 2	L1	L2
K-07404628	G 1/8	G 1/8	65,0	41,5
K-07404627	G 1/4	G 1/4	68,0	41,5
K-07404629	G 3/8	G 3/8	81,5	46,0