


K-WV 3/2 STECK GEW SCHL 2

3/2-way pilot valves with male thread and plug connection, flow direction from port to tube, conical male thread, coated

Характеристики

Рабочее давление	Max. 15 bar, coarse vacuum
Область температур	-20 °C to +80 °C
Рабочие среды	Compressed air and all gases or liquids that are compatible with the materials
рекомендуемые шланги	PU or PA (nylon)
Область применения	Air, vacuum
Уплотнительная поверхность	Parallel version: O-ring in housing, Conical version: thread coating
Материал	Plastic, Nickel plated brass
Прижимное кольцо	Plastic

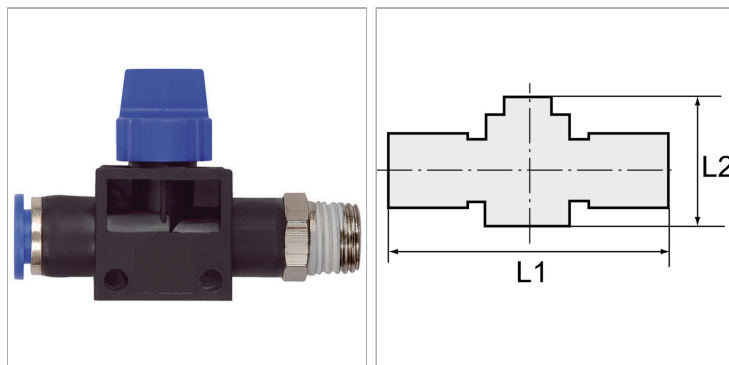

Указания

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Артикул

Наименование	Резьба	L1	L2
K-07404395	R 1/4	72,6	46,0
K-07404399	R 1/8	58,3	41,5
K-07404400	R 1/8	58,9	41,5
K-07404397	R 1/4	60,8	41,5
K-07404398	R 1/4	60,9	41,5
K-07404396	R 1/4	73,3	46,0
K-07404403	R 3/8	62,3	41,5
K-07404404	R 3/8	62,4	41,5
K-07404401	R 3/8	73,6	46,0
K-07404402	R 3/8	74,1	46,0
K-07404393	R 1/2	77,1	46,0
K-07404394	R 1/2	77,3	46,0