


3/2-way pilot valves with male thread and plug connection, tube to flow direction from port, parallel male thread with O-ring

Характеристики

Рабочее давление	Max. 15 bar, coarse vacuum
Область температур	-20 °C to +80 °C
Рабочие среды	Compressed air and all gases or liquids that are compatible with the materials
рекомендуемые шланги	PU or PA (nylon)
Область применения	Air, vacuum
Уплотнительная поверхность	Parallel version: O-ring in housing, Conical version: thread coating
Материал	Plastic, Nickel plated brass
Прижимное кольцо	Plastic

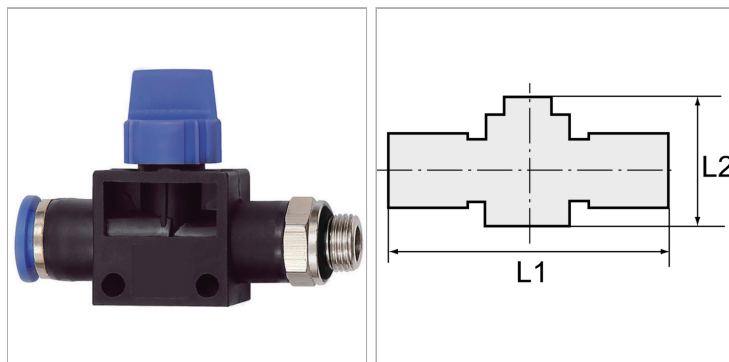

Указания

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Артикул

Наименование	Резьба	L1	L2
K-07404592	G 1/8	58,1	41,5
K-07404593	G 1/8	58,8	41,5
K-07404590	G 1/4	59,6	41,5
K-07404591	G 1/4	60,0	41,5
K-07404588	G 1/4	70,9	46,0
K-07404589	G 1/4	70,9	46,0
K-07404598	G 3/8	61,1	41,5
K-07404599	G 3/8	61,5	41,5
K-07404596	G 3/8	72,4	46,0
K-07404597	G 3/8	71,9	46,0
K-07404586	G 1/2	74,9	46,0
K-07404587	G 1/2	75,4	46,0