


# K-WV 3/2 STECK SCHL GEW 2

## 3/2-way pilot valves with male thread and plug connection, tube to flow direction from port, conical male thread, coated

### Характеристики

<b>Рабочее давление</b>	Max. 15 bar, coarse vacuum
<b>Область температур</b>	-20 °C to +80 °C
<b>Рабочие среды</b>	Compressed air and all gases or liquids that are compatible with the materials
<b>рекомендуемые шланги</b>	PU or PA (nylon)
<b>Область применения</b>	Air, vacuum
<b>Уплотнительная поверхность</b>	Parallel version: O-ring in housing, Conical version: thread coating
<b>Материал</b>	Plastic, Nickel plated brass
<b>Прижимное кольцо</b>	Plastic

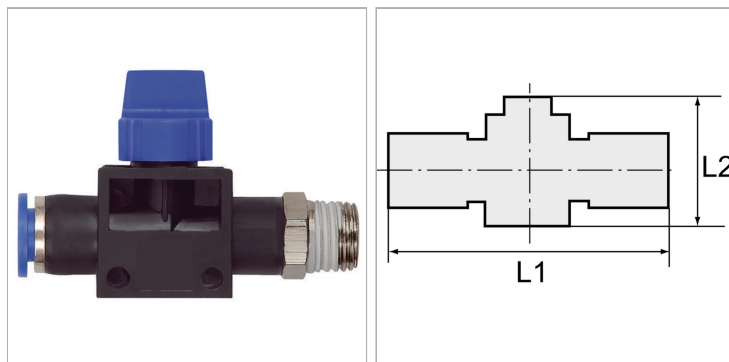

### Указания

Прочие данные только по запросу.

### Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

### Артикул

Наименование	Резьба	L1	L2
<a href="#">K-07404613</a>	R 1/8	58,3	41,5
<a href="#">K-07404614</a>	R 1/8	58,9	41,5
<a href="#">K-07404611</a>	R 1/4	60,8	41,5
<a href="#">K-07404612</a>	R 1/4	60,9	41,5
<a href="#">K-07404609</a>	R 1/4	72,6	46,0
<a href="#">K-07404610</a>	R 1/4	73,3	46,0
<a href="#">K-07404619</a>	R 3/8	62,3	41,5
<a href="#">K-07404620</a>	R 3/8	62,4	41,5
<a href="#">K-07404617</a>	R 3/8	73,6	46,0
<a href="#">K-07404618</a>	R 3/8	74,1	46,0
<a href="#">K-07404607</a>	R 1/2	77,1	46,0
<a href="#">K-07404608</a>	R 1/2	77,3	46,0