


Характеристики

Рабочее давление Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 1 bar (at 60 °C)

Резьбовые детали Polyamide (PA)

Гайка Polypropylene (PP)

Зажимное кольцо Polypropylene (PP)

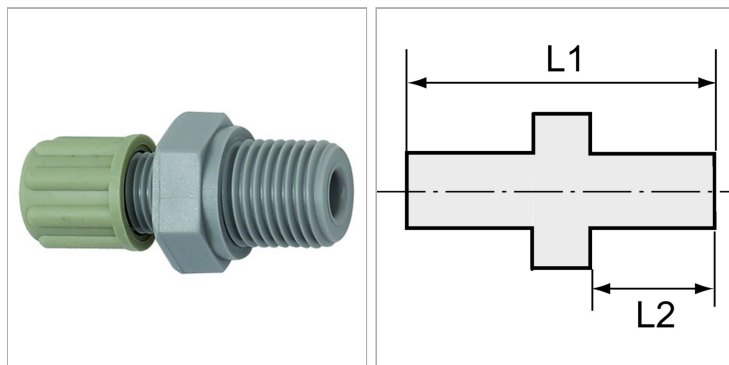

Указания

Прочие данные только по запросу.

Описание

Manufactured from high impact-resistant, UV-stabilised engineering plastic, extremely resistant to weathering. Good chemical resistance to benzene, diesel oil, fuel oil and alkalis.

Not suitable for use with acids.

Артикул

Наименование	Резьба	L1	L2
K-07403230	G 1/8	31,5	8,0
K-07403231	G 1/8	36,5	8,0
K-07403232	G 1/8	40,5	8,0
K-07403233	G 1/8	44,5	8,0
K-07403234	G 1/4	37,0	12,0
K-07403235	G 1/4	41,0	12,0
K-07403236	G 1/4	45,0	12,0
K-07403237	G 1/4	48,5	12,0
K-07403238	G 3/8	38,5	12,0
K-07403239	G 3/8	42,5	12,0
K-07403240	G 3/8	45,5	12,0
K-07403241	G 3/8	49,5	12,0
K-07403242	G 1/2	43,0	14,0
K-07403243	G 1/2	47,0	14,0
K-07403244	G 1/2	50,0	14,0
K-07403245	G 1/2	54,0	14,0