


### Характеристики

<b>Рабочее давление</b>	Max. 10 bar
<b>Область температур</b>	-20 °C to +80 °C
<b>Рабочие среды</b>	Compressed air and all gases or liquids that are compatible with the materials
<b>рекомендуемые шланги</b>	PU or PA (nylon)
<b>Область применения</b>	Air, vacuum
<b>Материал</b>	Plastic, Nickel plated brass
<b>Прижимное кольцо</b>	Plastic

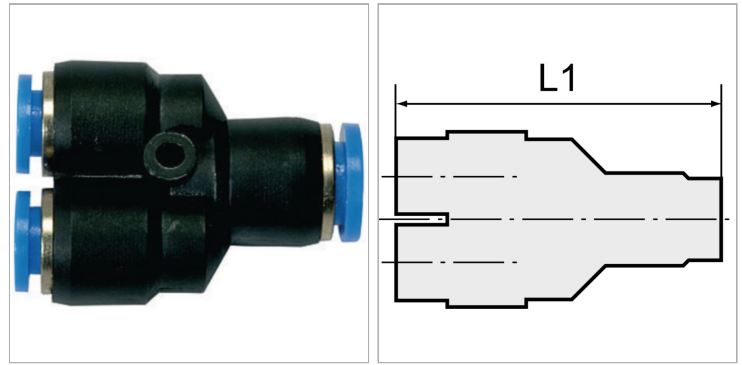

### Указания

Прочие данные только по запросу.

### Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

### Артикул

Наименование	L1
<a href="#">K-07400381</a>	36,5
<a href="#">K-07404207</a>	42,0
<a href="#">K-07400382</a>	39,8
<a href="#">K-07404208</a>	43,8
<a href="#">K-07400383</a>	48,9
<a href="#">K-07404209</a>	52,0
<a href="#">K-07400384</a>	52,6