


Характеристики

Соединение 1	Вставная часть муфты
Соединение 2	Наружная резьба BSP, цилиндрическая
Материал	Сталь
Защита поверхности	Hot dip galvanised

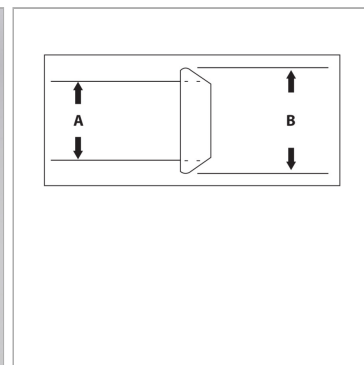

Артикул

Наименование	G1	Рабочее давление
PRTS50HR1.1/2	G 1.1/2" -11	25,0
PRTS50HR2	G 2" -11	25,0
PRTS70HR2	G 2" -11	25,0
PRTS70HR2.1/2	G 2.1/2" -11	25,0
PRTS70HR3	G 3" -11	25,0
PRTS89HR2.1/2	G 2.1/2" -11	25,0
PRTS89HR3	G 3" -11	25,0
PRTS108HR2.1/2	G 2.1/2" -11	25,0
PRTS108HR3	G 3" -11	25,0
PRTS108HR4	G 4" -11	25,0
PRTS133HR2.1/2	G 2.1/2" -11	25,0
PRTS133HR4	G 4" -11	25,0
PRTS133HR5	G 5" -11	25,0
PRTS159HR2.1/2	G 2.1/2" -11	25,0
PRTS159HR4	G 4" -11	25,0
PRTS159HR6	G 6" -11	25,0