


Характеристики

Соединение 1 - 3	Вставная втулка
Модель	Соединители
Конструкция	T-образная форма
Материал	Сталь
Защита поверхности	Гальваническое покрытие

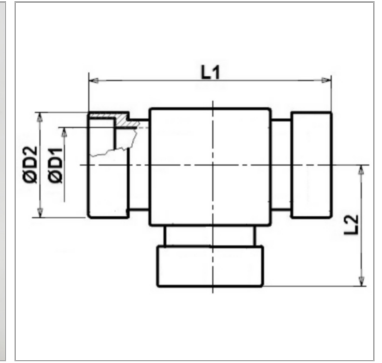

Артикул

Наименование	DN*	Ø D2	Размер	Дюймы	L1	L2	Макс. рабочее давление	Ø D1	Для шланга
TSSKV06M	6	16,0	4	1/4"	65,0	32,0	450	4,0	2 ST / 4 SP
TSSKV08M	8	16,0	5	5/8"	65,0	32,5	420	5,5	2 ST
TSSKV10M	10	20,0	6	3/8"	76,0	40,0	445	7,0	2 ST / 4 SP
TSSKV13M	12	22,0	8	1/2"	86,0	43,0	415	9,8	2 ST / 4 SP
TSSKV16M	16	29,0	10	5/8"	94,0	47,0	400	12,5	2 ST / 4 SP
TSSKV20M	19	28,0	12	3/4"	88,0	46,0	350	15,0	2 ST / 4 SP
TSSKV25M	25	33,0	16	1"	100,0	50,0	280	19,0	2 ST / 4 SP
TSSKV32M	31	39,8	20	1.1/4"	123,0	65,0	210	24,0	2 ST / 4 SP
TSSKV40M	38	53,0	24	1.1/2"	140,0	70,0	185	32,0	2 ST / 4 SP
TSSKV50M	51	65,0	32	2"	160,0	80,0	165	44,0	2 ST / 4 SP