


### Характеристики

<b>Соединение 1</b>	Вставная втулка
<b>Модель</b>	Концевая деталь
<b>Материал</b>	Сталь
<b>Защита поверхности</b>	Гальваническое покрытие

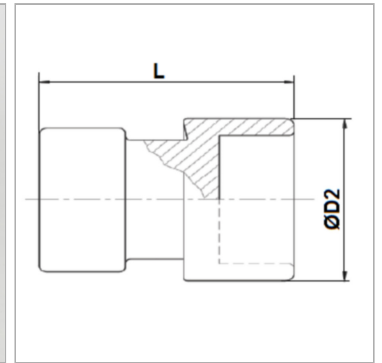

### Артикул

Наименование	Ø D2	DN*	Размер	Дюймы	Макс. рабочее давление	L	Для шланга
<a href="#">VSSSKV06M</a>	16,0	6	4	1/4"	450	25,0	2 ST / 4 SP
<a href="#">VSSSKV08M</a>	16,0	8	5	5/8"	420	25,0	2 ST
<a href="#">VSSSKV10M</a>	20,0	10	6	3/8"	445	31,0	2 ST / 4 SP
<a href="#">VSSSKV13M</a>	22,0	12	8	1/2"	415	32,0	2 ST / 4 SP
<a href="#">VSSSKV16M</a>	29,0	16	10	5/8"	400	32,0	2 ST / 4 SP
<a href="#">VSSSKV20M</a>	28,0	19	12	3/4"	350	42,0	2 ST / 4 SP
<a href="#">VSSSKV25M</a>	33,0	25	16	1"	280	43,5	2 ST / 4 SP
<a href="#">VSSSKV32M</a>	39,8	31	20	1.1/4"	210	52,0	2 ST / 4 SP
<a href="#">VSSSKV40M</a>	53,0	38	24	1.1/2"	185	50,0	2 ST / 4 SP
<a href="#">VSSSKV50M</a>	65,0	51	32	2"	165	50,0	2 ST / 4 SP