
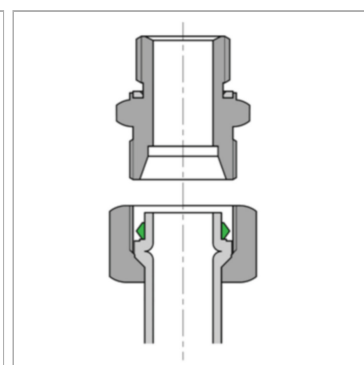


### Характеристики

<b>Модель</b>	Мягкое уплотнение
<b>Материал</b>	FPM 80 Shore
<b>Область температур</b>	-20 °C to +180 °C

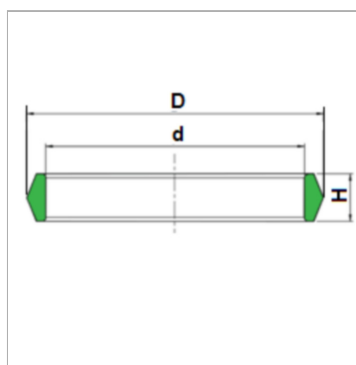

### Артикул

Наименование	Ø d1	S	Для резьбы	Ø Da
<a href="#">WDNW04LWR</a>	6	2,7	M 12 x 1,5	8,0
<a href="#">WDNW06LWR</a>	8	2,7	M 14 x 1,5	10,0
<a href="#">WDNW08LWR</a>	10	3,0	M 16 x 1,5	12,2
<a href="#">WDNW10LWR</a>	12	3,0	M 18 x 1,5	14,2
<a href="#">WDNW13LWR</a>	15	3,0	M 22 x 1,5	17,2
<a href="#">WDNW16LWR</a>	18	3,0	M 26 x 1,5	20,2
<a href="#">WDNW20LWR</a>	22	3,0	M 30 x 2	24,2
<a href="#">WDNW25LWR</a>	28	3,0	M 36 x 2	30,2
<a href="#">WDNW32LWR</a>	35	3,5	M 45 x 2	37,8
<a href="#">WDNW40LWR</a>	42	3,5	M 52 x 2	44,8
<a href="#">WDNW13SWR</a>	16	3,0	M 24 x 1,5	18,2
<a href="#">WDNW16SWR</a>	20	3,7	M 30 x 2	23,0
<a href="#">WDNW20SWR</a>	25	3,7	M 36 x 2	28,0
<a href="#">WDNW25SWR</a>	30	3,9	M 42 x 2	33,0
<a href="#">WDNW32SWR</a>	38	3,5	M 52 x 2	40,8