


### Характеристики

<b>Свойства</b>	No moving parts, which means no wear and no maintenance Vacuum generator with high maximum vacuum level (85% vacuum) ultra small footprint, suitable for confined spaces minimal air consumption
<b>Применение</b>	by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces
<b>Корпус</b>	Aluminium eloxed (type VR)
<b>Система форсунок</b>	Brass (type VR)
<b>Соединение</b>	Вставное соединение

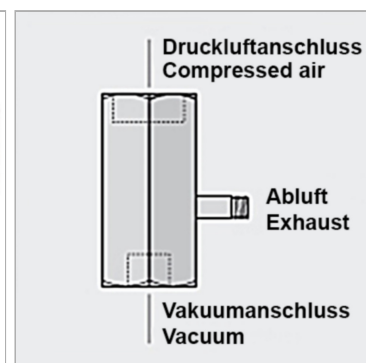

### Информация о продукте

<b>Размер форсунки</b>	1
<b>Подключение системы сжатого воздуха</b>	G 1/4 IG
<b>Вакуумное соединение</b>	G1/8 female
<b>Подключение к системе вытяжной вентиляции</b>	M 5 male
<b>Степень разрежения</b>	89 %

<b>Степень разрежения</b>	89 %
<b>Расход воздуха при всасывании</b>	36 l/min
<b>макс. скорость откачки</b>	21 l/min
<b>Длина</b>	35 mm
<b>Рабочее давление</b>	5 bar

### Указания

Прочие данные только по запросу.

### Описание

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.