


Характеристики

Свойства	<p>Vacuum generator with integrated control valves and system monitoring functions</p> <p>Gripping and blowing off can be controlled without the need for external valves</p> <p>Optimised air consumption thanks to many models with differing suction capacities</p> <p>Minimum energy costs in continuous operation</p> <p>Easy adjustment with foil keypad and LED display of the settings</p> <p>Minimum size, low weight</p> <p>Optimum vacuum generation directly on the suction pad</p> <p>Complete solution for very simple installation</p> <p>Short learning curve thanks to "teach" function</p> <p>No need for additional sensors</p> <p>Easily visible status indication</p>
-----------------	--

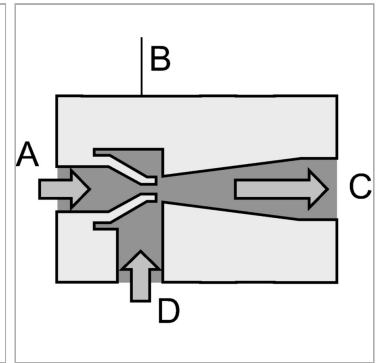

Применение	<p>Ideal where space is restricted and for highly dynamic movements, handling with industrial robots, linear axes pick-and-place systems</p>
-------------------	--

Степень разрежения	85 %
---------------------------	------

Основные части	Anodised aluminium
-----------------------	--------------------

Дополнительная информация	<p>Achtung: Bitte pro Ejektor immer 2 Anschlussstecker bestellen.</p> <p>Abblasventil NC, Filter, Schalldämpfer, Rückschlagventil Integriert.</p>
----------------------------------	---

Информация о продукте

Размер форсунки	1
Состояние покоя всасывающего клапана	NC
Подключение системы сжатого воздуха	M 5 IG
Вакуумное соединение	M5 female

Расход воздуха при всасывании	46 l/min
макс. скорость откачки	23 l/min
Размер	65 mm x 10 mm x 107 mm
Рабочее давление	4.5 bar

Указания

Прочие данные только по запросу. Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy.

Описание

Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Дополнительная информация

Important: Order two connection plugs per ejector. NC blow-off valve, filter, silencer, non-return valve integrated.